

79L05


Three-terminal negative voltage regulator

SOT-89

FEATURES

- Maximum output current
 $I_{OM}: 0.1A$
- Output voltage
 $V_o: -5V$
- Continuous total dissipation
 $P_D: 0.6W (T_a = 25^\circ C)$

1.GND
2.IN
3.OUT



ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	-30	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	208.3	$^\circ C/W$
Operating Junction Temperature Range	T_{OPR}	-40~+125	$^\circ C$
Storage Temperature Range	T_{STG}	-65~+150	$^\circ C$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i = -10V, I_o = 40mA, C_i = 0.33\mu F, C_o = 0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Mj	Trnd	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ C$	-4.85	-5.0	-5.15	V
		$-7V \leq V_i \leq -20V, I_o = 1mA \sim 40mA$	-4.75	-5.0	-5.25	V
		$I_o = 1mA \sim 70mA$	-4.75	-5.0	-5.25	V
Load Regulation	ΔV_o	$I_o = 1mA \sim 100mA, T_J = 25^\circ C$		20	60	mV
		$I_o = 1mA \sim 40mA, T_J = 25^\circ C$		10	30	mV
Line Regulation	ΔV_o	$-7V \leq V_i \leq -20V, T_J = 25^\circ C$		15	150	mV
		$-8V \leq V_i \leq -20V, T_J = 25^\circ C$		12	100	mV
Quiescent Current	I_q	$T_J = 25^\circ C$			6	mA
Quiescent Current Change	ΔI_q	$-8V \leq V_i \leq -20V$			1.5	mA
	ΔI_q	$1mA \leq V_i \leq 40mA$			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz, T_J = 25^\circ C$		40		$\mu V/V_o$
Ripple Rejection	RR	$-8V \leq V_i \leq -18V, f = 120Hz, T_J = 25^\circ C$	41	49		dB
Dropout Voltage	V_d	$T_J = 25^\circ C$		1.7		V







* Pulse test.


TYPICAL APPLICATION

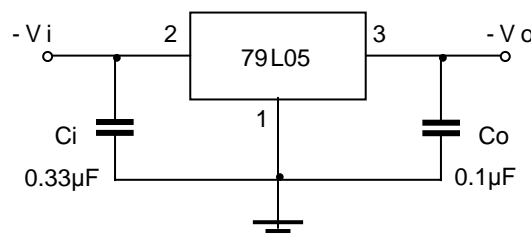

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

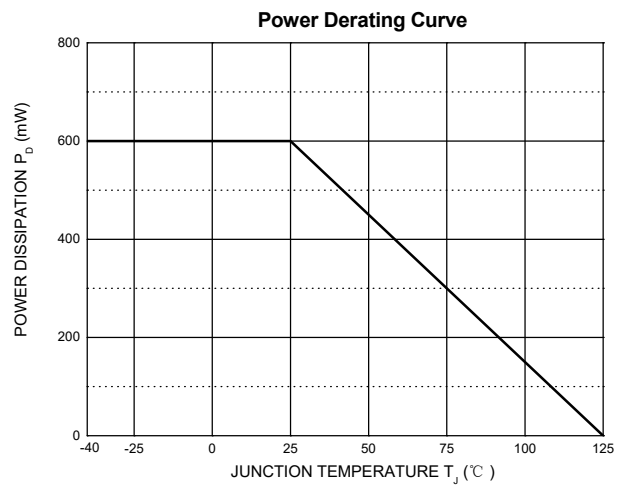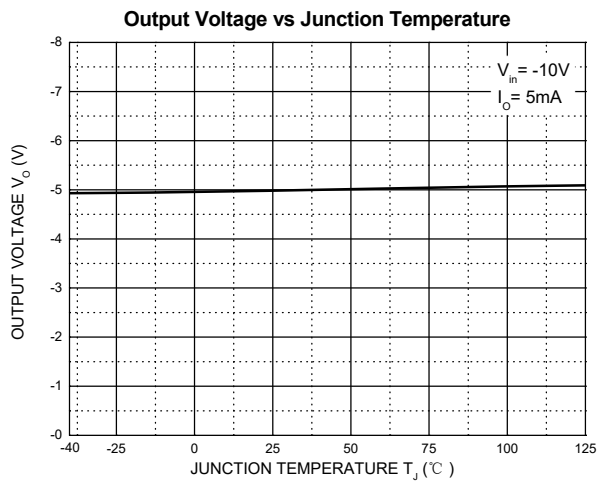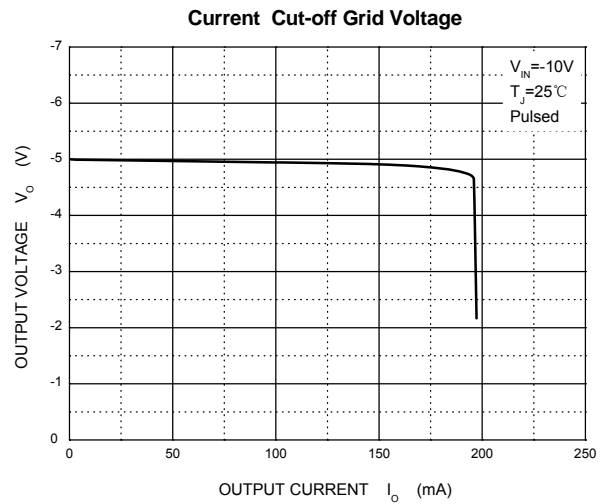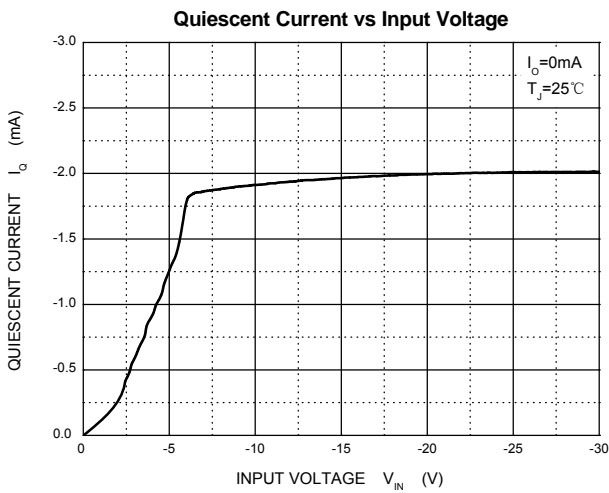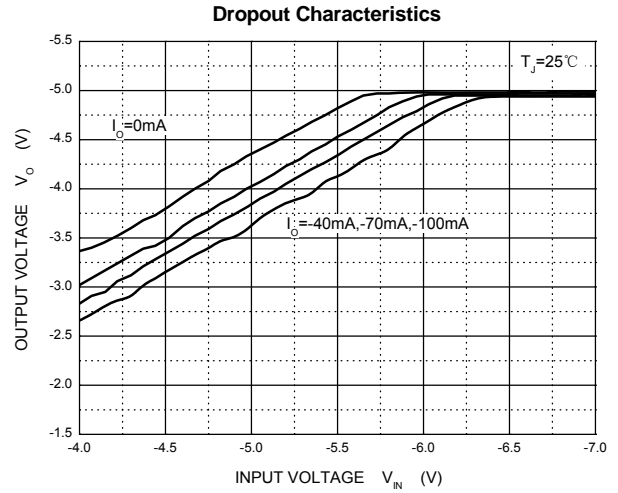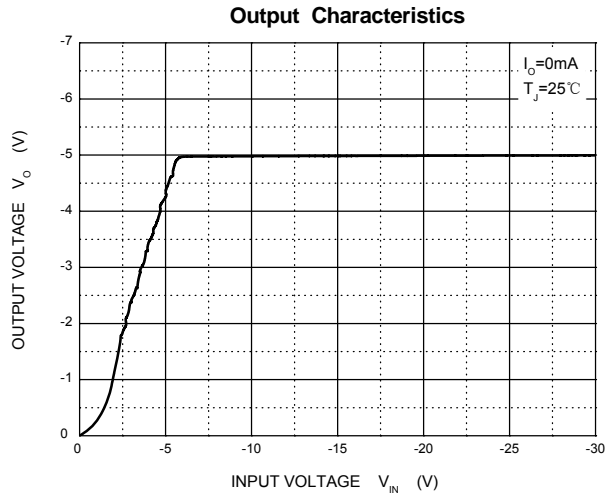

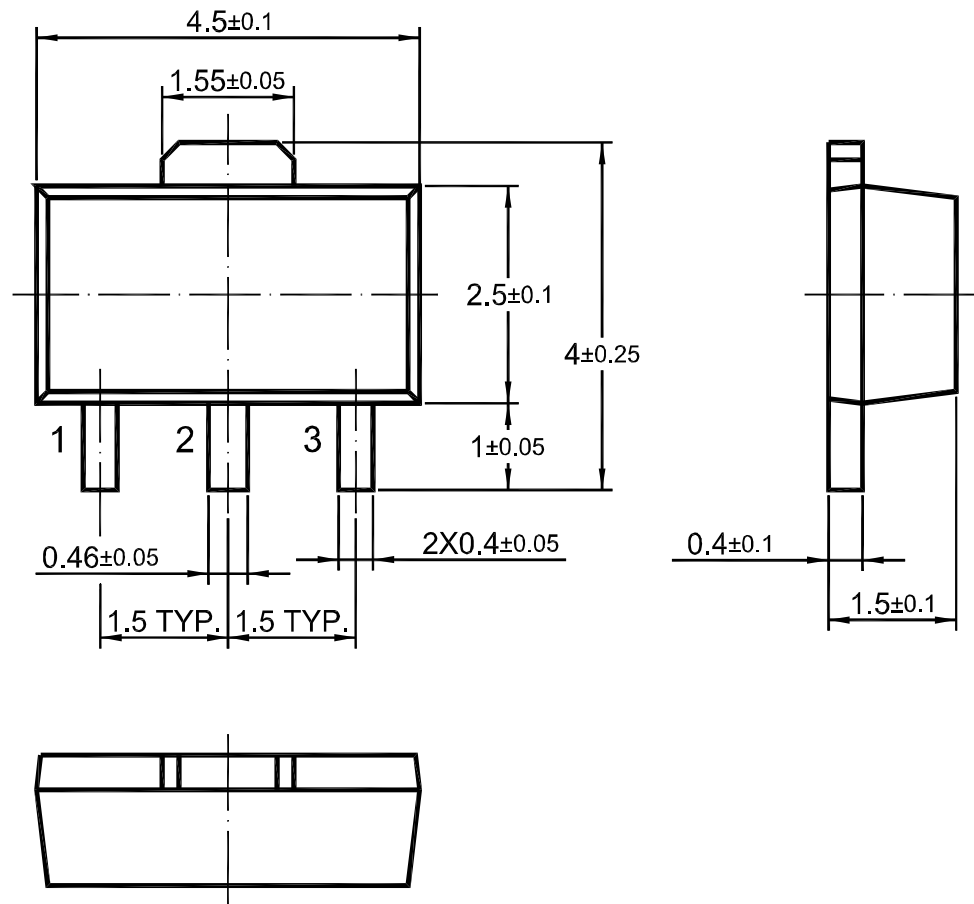SOT-89 PACKAGE OUTLINE

Dimensions in mm